


Single Skin Continuous Roller Shutter ES G45C

Galvanized Iron Continuous Slat

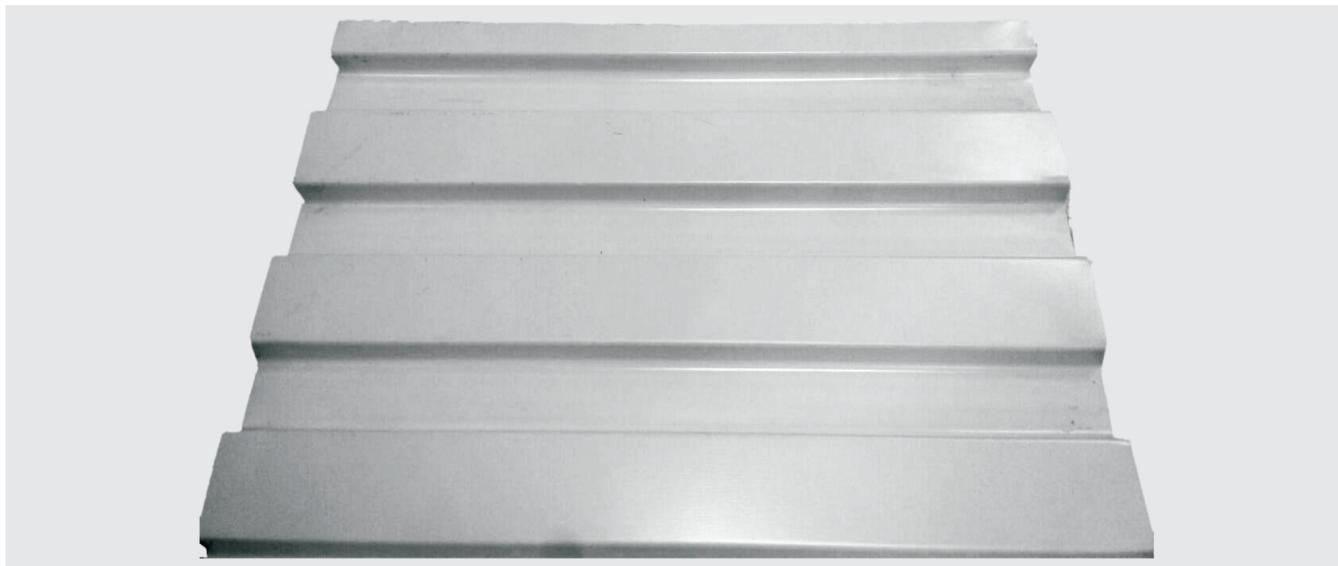


Technical Features

Crest Width	45.0 mm
Trough Width	35.0 mm
Nominal Thickness	0.5 mm
Maximum Standard Width	6.0 m
Maximum Standard Height	6.0 m

Standard Features

Operation	Electric operation by 3 phase motor with hand chain manual override and safety brake fitted as standard.
Finish	Mill finish or powder coated
Color	Available in standar RAL

Guide Rail

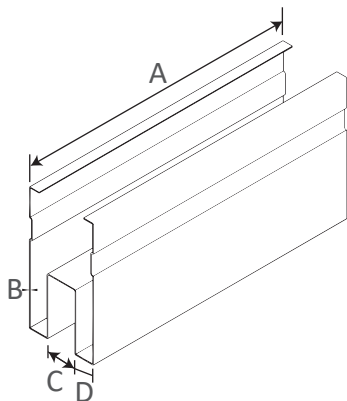


Code	Slat Application	Shutter Width(m)	Dimension(mm)			
			A	B	C	D
GR 28 G	C - 45	0 - 6.0	110	1	28	23

*Available Material: *G-Galvanized Iron

*GR-Guide rail


Round Axle

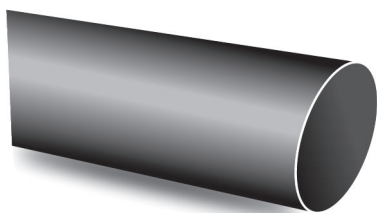

Code	Slat Application	Shutter Width(m)	Dimension(mm)	
			Diameter	Thickness
RA 133 G	C - 45	0 - 6.0	133	4.5

*Available Material: *G-Galvanized Iron


Bottom Slat

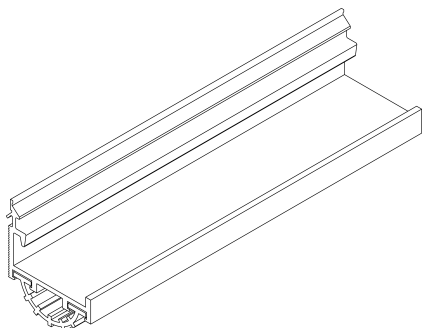

'L' Shaped Heavy duty, 2mm thick aluminium extruded bottom slat fitted with rubber finished weather seal to prevent the entry of dirt.

ES G45C

Roller Shutter Schematic Diagram

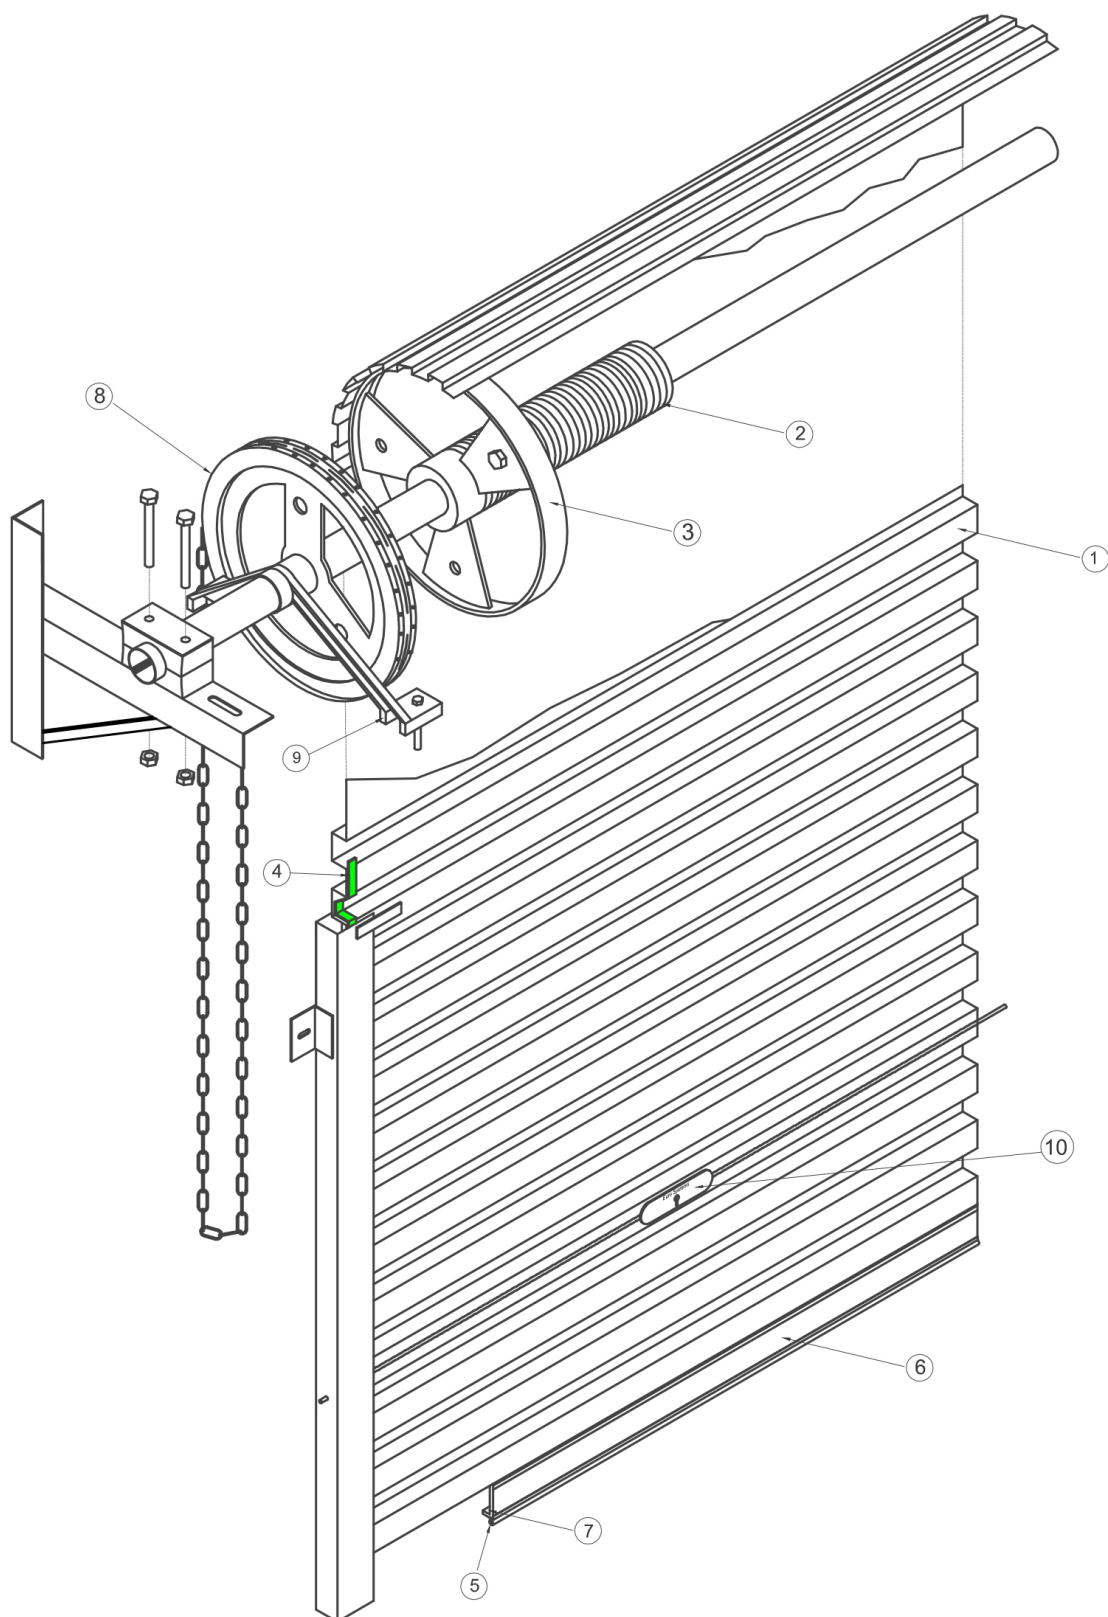

1. Roller shutter curtain | 2. Spring assistance | 3. Drum wheel | 4. Polyglide | 5. Weatherseal
6. Bottom rail | 7. Door stop/roller | 8. Direct chain wheel | 9. Chain guide | 10. Lock set